

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number  
**WO 2005/003017 A1**

(51) International Patent Classification<sup>7</sup>: **B67C 3/02**,  
3/20, 3/24

(21) International Application Number:  
PCT/IB2004/002156

(22) International Filing Date: 30 June 2004 (30.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
BO2003A000409 1 July 2003 (01.07.2003) IT

(71) Applicant (for all designated States except US):  
**AZIONARIA COSTRUZIONI MACCHINE [IT/IT];**  
**AUTOMATICHE A.C.M.A. S.p.A.**, Via Cristoforo  
Colombo, 1, I-40131 Bologna (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PASQUALI, Mario**

[IT/IT]; Strada Muratello, 5, I-40065 Marmirolo (IT).  
**CAVALLARI, Stefano [IT/IT];** Via del Meloncello, 5,  
I-40135 Bologna (IT).


(74) Agents: **BIANCIARDI, Ezio et al.;** Bugnion S.p.A., Via  
Goito, 18, I-40126 Bologna (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: EQUIPMENT FOR FILLING CONTAINERS

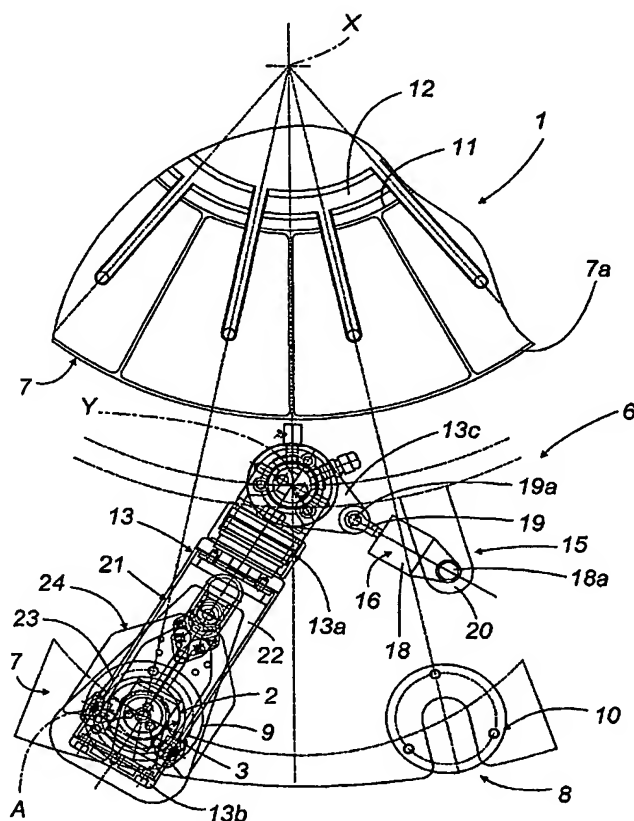

(57) Abstract: Containers (2), typically bottles (3), are filled by equipment (1) incorporating a fixed frame (6) and a rotating carousel (7) fitted with a plurality of filler units (8) distributed around the periphery, each comprising a first and a second dispensing outlet (9, 10) connected to respective first and second tanks (11, 12) holding first and second packageable substances, a supporting structure (13) on which to stand a container (2), and an actuator mechanism (15) associated with the supporting structure (13). The supporting structure (13) is caused to alternate by the associated mechanism (15) between a first filling position, in which the first outlet (9) is placed in alignment with a mouth (5) of the respective container (2), and a second filling position in which the second outlet (10) is placed in alignment with the mouth (5) of the container (2), so that the container (2) can be filled with two different substances in the course of a single pass around the carousel.

WO 2005/003017 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*